

Cable Accessories

Metal Parts



HKC-01
Copper Wire Mesh

Application:


It's used for the connection of cable metallic shielding of low voltage and medium voltage cable joints and terminations.

Features:

Formed by knitting from wire into a tube. Wire is tinned copper with no evidence of tarnish.

Dimensions:

Size	Diameter of wire	Width of mesh	Length of mesh
HKC 0101	0.13mm	70mm	500-6000mm

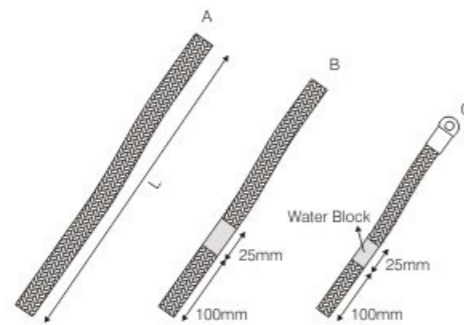

HKC-02
Earth Braid

Application:

It's used for the earthing system of low voltage and medium voltage cable application.

Features:



Wire is tinned copper, minimum 99.9% copper after stripping of tin coating.

Dimensions:

Size	Cross section(mm ²)	Diameter of wire(mm)	Width of solder(mm)	Length of earth braid(mm)
HKC 02A01	10	0.13	/	200-2000
HKC 02B01			25-30	
HKC 02C01			25-30	
HKC 02A02	16	0.13	/	200-2000
HKC 02B02			25-30	
HKC 02C02			25-30	
HKC 02A03	25	0.13	/	200-2000
HKC 02B03			25-30	
HKC 02C03			25-30	
HKC 02A04	35	0.13	/	200-2000
HKC 02B04			25-30	
HKC 02C04			25-30	
HKC 02A05	50	0.13	/	200-2000
HKC 02B05			25-30	
HKC 02C05			25-30	

Cable Accessories

Metal Parts

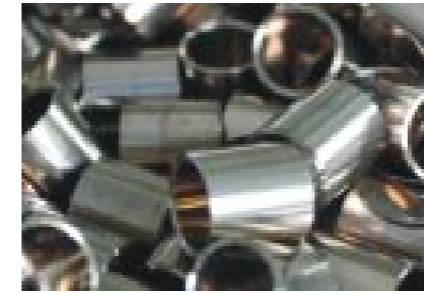

HKC-03
Roll Spring

Application:

It's used for fixing the shielding of low voltage and medium voltage cable joints and terminations.


Features:

It's made of roll steel with polished surface.

Dimensions:

Size	Application range(mm)	Detail description of roll spring size(mm)			Length of the roll
		T \pm 0.1	w \pm 0.5	D \pm 2	
HKC 0301	9-15	0.1	10	7.5	240
HKC 0302	12-21	0.15	16	11	260
HKC 0303	17-22	0.2	19	14	300
HKC 0304	19-29	0.2	19	16	340
HKC 0305	25-37	0.24	19	22	700
HKC 0306	31-50	0.35	19	23	780
HKC 0307	34-70	0.45	19	32	800
HKC 0308	58-94	0.45	19	42	950
HKC 0309	60-130	0.6	19	45	980

T – thickness of the strip.

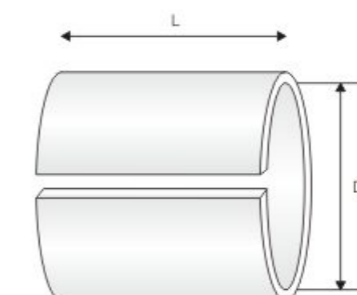

HKC-04
Support Ring

Application:

It's used for the earthing system of low voltage and medium voltage cable application.

Features:

Support ring is plated so as to prevent any corrosion. All edges are deburred and smoothed. Available as single piece or 2 halves.

Dimensions:

Size	Detail description of support ring size(mm)		Wall thickness
	L	D	
HKC 0401	20	13	1.0
HKC 0402	25	19	1.5
HKC 0403	30	27	1.5
HKC 0404	40	44	2.0
HKC 0405	50	60	2.0
HKC 0406	60	70	2.0