



HCMB

Cold Shrink 3 cores cable Breakout

Shelf life & storage:

HCMB Cold shrink 3 cores cable breakout has long shelf life when stored in a humidity controlled storage(-10°C to 40°C and < 75% relative humidity).

Ordering information:

Standard colors:
Dark gray.

Features:


- Quick, easy and safe installation
- Immediate reenergizing
- High mechanical strength
- Waterproof
- Accommodates a wide range of cable sizes
- Seals tight, retains its resiliency and pressure



Key technical performances:

Test Items	Test Method	Test Requirements
Tensile strength	ASTM D 638	7MPa min.
Ultimate elongation	ASTM D 638	600% min.
Tear strength	ASTM D 638	20KN/m min.
Density	ASTM D 792	1.2g/cm ³

Selection table:

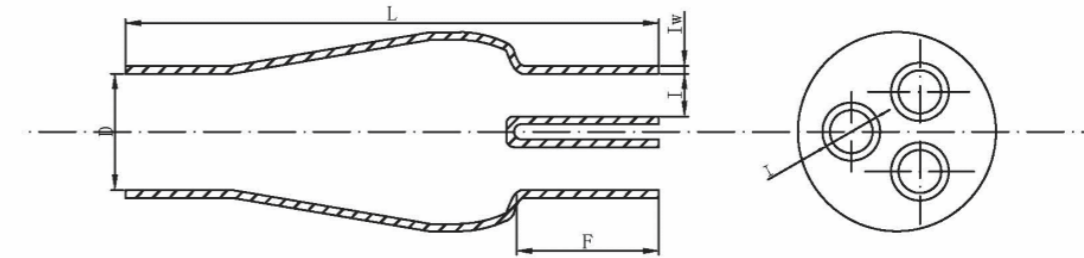

Size	D (mm)		l (mm)		Recovered wall (±20%) lw	Recovered length (±10%)	
	a* (Min.)	b* (Max.)	a* (Min.)	b* (Max.)		L	F
HCMB-75/38	75	38	31	14	2.5	170	45
HCMB-92/43	92	43	36	16	2.5	180	45
HCMB-105/53	105	53	41	19	2.5	190	45
HCMB-120/62	120	62	48	23	3.5	201	45
HCMB-160/68	160	68	67	27	3.5	230	60
HCMB-200/85	200	85	80	32	3.5	230	60

NOTE : a = Inner diameter as supplied
b* = Inner diameter after fully recovered

HKIT/HKOT
Heat Shrink
Termination

HKSJ
Heat Shrink
Joint

HAT/HATA
Medium
Voltage Tubing

HAS/HMB/HMR
Moulded Parts

HLVT/HLVJ
Heat Shrink
Termination & Joint

HRSL
Heat Shrink
Cable Repair Sleeve

HCSIT/HCSOT
Cold Shrink
Termination

HCSSJ
Cold Shrink Joint

HPMC/HPMRC
Cable Connector

HCSTT
Cold Shrink
Trifurcation Kit

HCST
Cold Shrink
Insulated Tubing

HCMB
Cold Shrink 3
Cores Cable
Breakout

HCRK-S
Cast Resin
Straight
Through Joints

HCRK-B
Cast Resin
Branch Joints